

KEY FEATURES

- Input under Voltage Protection
- Over Current Protection (Hiccup Mode)
- Short Circuit Protection (Hiccup Mode)
- Over Voltage Protection (Hiccup Mode)
- Over Temperature Protection (Self-recovery)
- Remote ON/OFF Control
- Remote Sense
- Output Voltage Trim
- UL60950-1 and CSA C22.2 No. 60950-1-07
- Meet UL94V-0 Flammability Requirements
- Rohs6 Compliant
- Size: 2.28 x 1.45 x 0.5 Inches
- 3-Years Product Warranty

DESCRIPTION

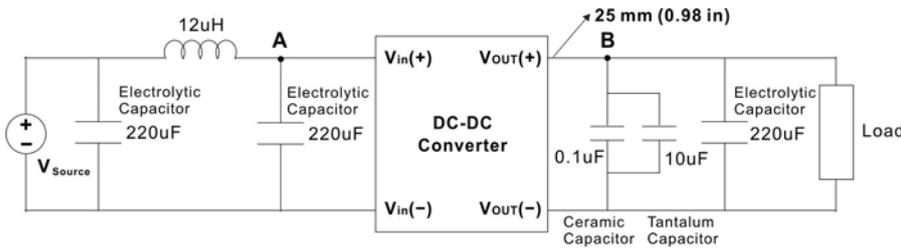
The BR300-12S is a new generation isolated DC-DC converter that uses an industry standard quarter-brick structure, and features high efficiency and power density, operates from an input voltage range of 36 V to 75 V, provides the rated output voltage of 12V and the maximum output current of 25A.



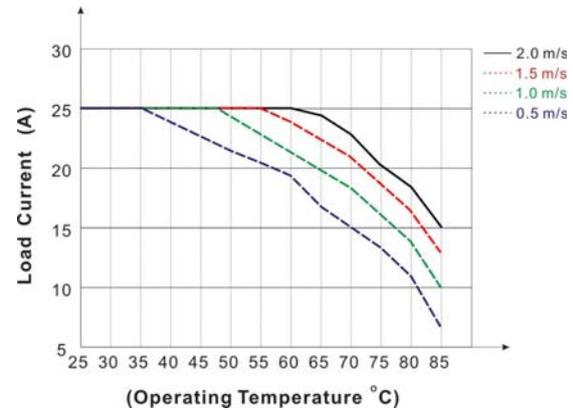
ELECTRICAL SPECIFICATIONS

Conditions: TA = 25°C (77°F), Airflow = 1 m/s (200 LFM), Vin = 48 V, unless otherwise notes.

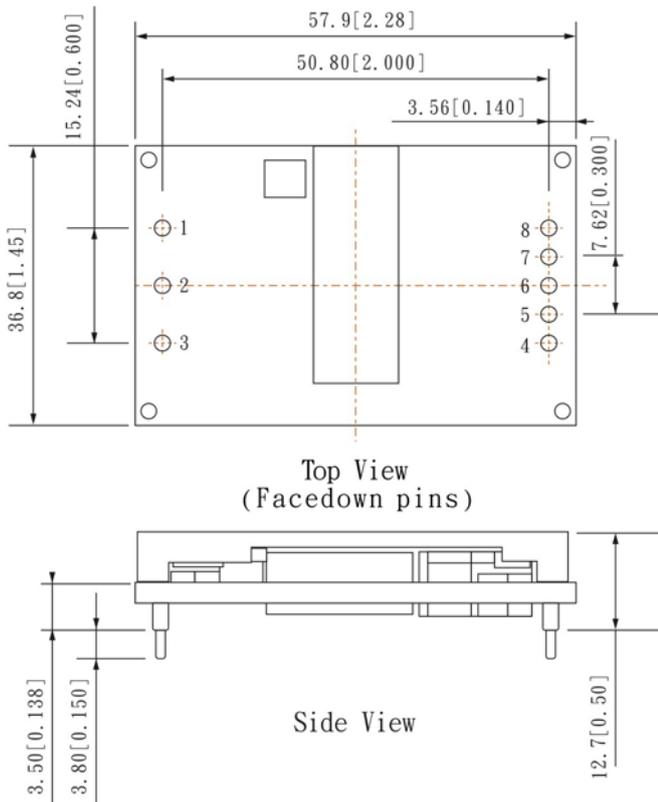
Model No.		BR300-12S	
Max Output Wattage (W)		300W	
Input	Voltage (V.DC.)	48V (36~75V)	
	Current (A) (max)	15A	
	No-Load Loss (W) (typ.)	3.5W	
Output	Voltage (V.DC.)	12V	
	Regulated Voltage Precision (max.)	±3.5%	
	Current (A) (max.)	25A	
	Line Regulation (LL-HL) (typ.)	±0.2%	
	Load Regulation (0-100%) (typ.)	±3%	
	Ripple & Noise (peak to peak) (typ.)	150 mV (Oscilloscope Bandwidth:20 MHz)	
	Efficiency (typ.) (Vin = 48 V; TA=25°C (77°F))	100% Load	95%
	50% Load	95.5%	
	20% Load	92%	
Protection	Over Power Protection	Hiccup mode	
	Over Current Protection	Hiccup mode	
	Over Voltage Protection	13.8~16.8V (Hiccup mode)	
	Short Circuit Protection (max.)	Hiccup mode	
	Over Temperature Protection	Threshold:105~125°C (typ.) / Hysteresis:5°C (min.) Self-recovery (The values are obtained by measuring the temperature of the PCB near the thermal resistor.)	
Isolation	Voltage (V.DC.)	1500 VDC (Basic Isolation)	
Environment	Operating Temperature	-40°C...+85°C	
	Storage Temperature	-55°C...+125°C	
	Temperature Coefficient (max.)	0.02 % Vout / °C (TA = -40°C to +85°C (-40°F to +185°F))	
	Humidity	95% RH	
	MTBF	1.5 Million Hours (Telcordia SR332; 80% load; Airflow = 1.5m/s (300 LFM); TA = 40°C (104°F))	
Safety	Agency Approvals	CE, UL, TÜV	
EMC	EMI (Conducted & Radiated Emission)	UL60950-1 and CSA C22.2 No. 60950-1-07	
Physical	Dimension (L x W x H)	2.28 x 1.45 x 0.5 Inches (57.9 x 36.8 x 12.7 mm) Tolerance ±0.5 mm	
	Weight	60 g	
Other	Remote On/Off Voltage	Low level (V.DC.)	-0.7~1.2V
		High level (V.DC.)	3.5~12V
	On/Off Current	Low level (mA) (max.)	1mA

NOTE


1. During the test of input reflected ripple current, the input terminal must be connected to a 12uH inductor and a 220uF electrolytic capacitor.
2. Point B, which is for testing the output voltage ripple, is 25 mm (0.98 in.) away from the Vout(+) pin.

DERATING

MECHANICAL DIMENSION

Unit: mm [in.]



PIN#	Single
1	+DC IN
2	ON / OFF CTL
3	-DC IN
4	-DC OUT
5	-Sense
6	TRIM
7	+Sense
8	+DC OUT

Note

1. All dimensions in mm [in.] Tolerances: $x.x \pm 0.5$ mm [$x.xx \pm 0.02$ in.] $x.xx \pm 0.25$ mm [$x.xxx \pm 0.010$ in.]
2. Pin 1-3, 5-7 are 1.00 ± 0.05 mm [0.040 ± 0.002 in.] diameter with 2.00 ± 0.10 mm [0.080 ± 0.004 in.] diameter standoff shoulders.
Pin4 and pin8 are 1.50 ± 0.05 mm [0.060 ± 0.002 in.] diameter with 2.50 ± 0.10 mm [0.098 ± 0.004 in.] diameter standoff shoulders.