



FEATURES:

- RoHS compliant SIP7 package
- High efficiency up to 79%
- I/O Isolation 6000 VDC
- Low coupling capacity
- Physical clearance of Isolation barrier 2.5mm
- Safety barrier 100% production tested
- Rated working voltage of 250 Vrms
- Continuous Short Circuit Protection



Models Single output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	*Maximum output ripple & noise (mV p-p)	Switching frequency (kHz)	Max Capacitive Load (uF)	Efficiency (%)
AM1DC-0503SH60Z	5	3.3	303	200	25	220	71
AM1DC-0505SH60Z	5	5	200	200	24	220	75
AM1DC-0509SH60Z	5	9	111	150	24	220	77
AM1DC-0512SH60Z	5	12	83	150	35	220	76
AM1DC-0515SH60Z	5	15	67	150	36	220	77
AM1DC-1203SH60Z	12	3.3	303	200	30	220	70
AM1DC-1205SH60Z	12	5	200	200	30	220	74
AM1DC-1209SH60Z	12	9	111	150	30	220	76
AM1DC-1212SH60Z	12	12	83	150	31	220	76
AM1DC-1215SH60Z	12	15	67	150	31	220	76
AM1DC-2403SH60Z	24	3.3	303	150	43	220	70
AM1DC-2405SH60Z	24	5	200	150	42	220	71
AM1DC-2409SH60Z	24	9	111	120	44	220	70
AM1DC-2412SH60Z	24	12	83	150	43	220	72
AM1DC-2415SH60Z	24	15	67	150	45	220	73

Models Dual output

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	*Maximum output ripple & noise (mV p-p)	Switching frequency (kHz)	Max Capacitive Load (uF)	Efficiency (%)
AM1DC-0503DH60Z	5	±3.3	±152	±120	23	±100	73
AM1DC-0505DH60Z	5	±5	±100	±120	23	±100	75
AM1DC-0509DH60Z	5	±9	±56	±75	24	±100	79
AM1DC-0512DH60Z	5	±12	±42	±75	36	±100	77
AM1DC-0515DH60Z	5	±15	±33	±75	35	±100	77
AM1DC-1203DH60Z	12	±3.3	±152	±120	32	±100	72
AM1DC-1205DH60Z	12	±5	±100	±120	30	±100	73
AM1DC-1209DH60Z	12	±9	±56	±75	31	±100	75
AM1DC-1212DH60Z	12	±12	±42	±75	31	±100	74
AM1DC-1215DH60Z	12	±15	±33	±75	31	±100	76
AM1DC-2403DH60Z	24	±3.3	±152	±100	43	±100	72
AM1DC-2405DH60Z	24	±5	±100	±100	42	±100	69
AM1DC-2409DH60Z	24	±9	±56	±75	41	±100	73
AM1DC-2412DH60Z	24	±12	±42	±100	43	±100	72
AM1DC-2415DH60Z	24	±15	±33	±100	47	±100	75

*Output ripple and noise are measured without external connection of filtering capacitors. For reducing these values please refer to the recommended circuit below.

Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	5	4.5-5.5		VDC
	12	10.8-13.2		
	24	21.6-26.4		
Filter	Capacitor			
Turn on Transient process time	5 Vin	760		µs
	12 Vin	300		
	24 Vin	280		
Start up time	5 Vin	2.8		ms
	12 Vin	2.3		
	24 Vin	2.24		
Absolute Maximum Rating	5 Vin	0-7		VDC
	12 Vin	0-15		
	24 Vin	0-28		
Peak Input Voltage time			100	ms
Quiescent Current	5 Vin	30-40		mA
	12 Vin	20		
	24 Vin	10-15		
Rise time	5 Vin	180		µs
	12 Vin	200		
	24 Vin	180		
Input Reflected Ripple current	Thru 12µH inductor, 5Hz to 20MHz		20	mA rms

Isolation Specifications

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage (rated for 1 min)	Flash tested for 3sec.		6000	VDC
Rated working voltage		250		V rms
Resistance		>1000		MOhm
Capacitance		10		pF

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±3		%
Voltage balance (Dual output model)	Balanced Load	±1		%
Short Circuit protection		Continuous		
Short circuit restart		Auto recovery		
Line voltage regulation	For 1% change of V in	±1.2		%
Load voltage regulation	From 10 to 100% load	±10		%
Temperature coefficient		±0.03		%/°C
Maximum Capacitive load	Single output models		220	µF
	Dual output models		±100	

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	See models table		KHz
Clearance Distance	Input to Output	2.5		mm
Operating temperature	Full Load without Derating	-40 to +70		°C
Storage temperature		-40 to +125		°C
Maximum case temperature			100	°C
Cooling	Free air convection			
Humidity			95	% RH
Case material	Non-conductive black plastic, epoxy encapsulated (UL94V-0 rated)			
Soldering temperature	1.5mm from case for 10 sec.		260	°C
Weight		4.2		g
Dimensions (L x W x H)		0.77 x 0.39 x 0.47 inches	19.56 x 9.80 x 12.00 mm	
MTBF		>2 390 000 hrs (MIL-HDBK-217 F at +25°C)		

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

Safety Specifications


Parameters

Standards	EN 55022: 2010, Class B EN 55024: 2010 IEC 61000-4-2: 2008 IEC 61000-4-3: 2010 IEC 61000-4-4: 2012 IEC 61000-4-6: 2008 IEC 61000-4-8: 2009 Designed to meet IEC 60950-1: 2001
-----------	--


Pin Out Specifications

Pin	6000 VDC	
	Single	Dual
1	+ V Input	+ V Input
2	- V Input	- V Input
5	- V Output	- V Output
6	No pin	Common
7	+ V Output	+ V Output


Dimensions

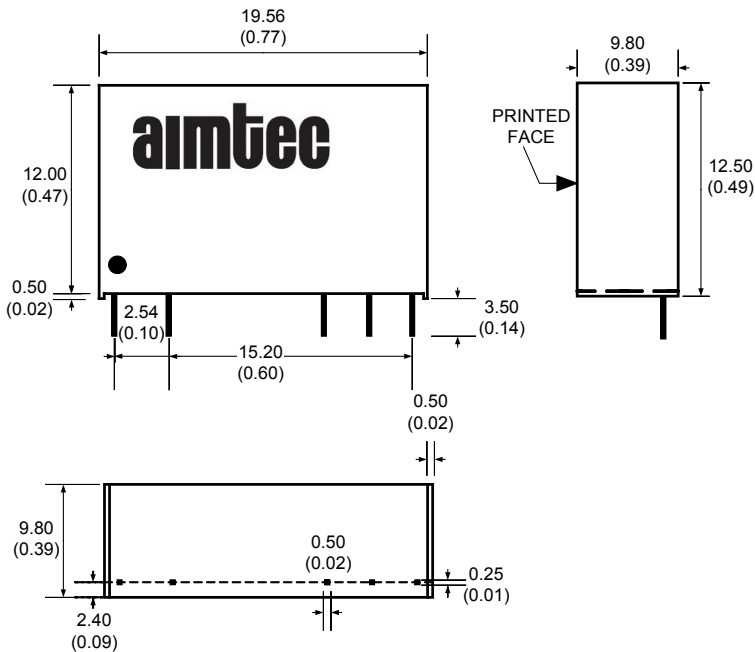

Derating

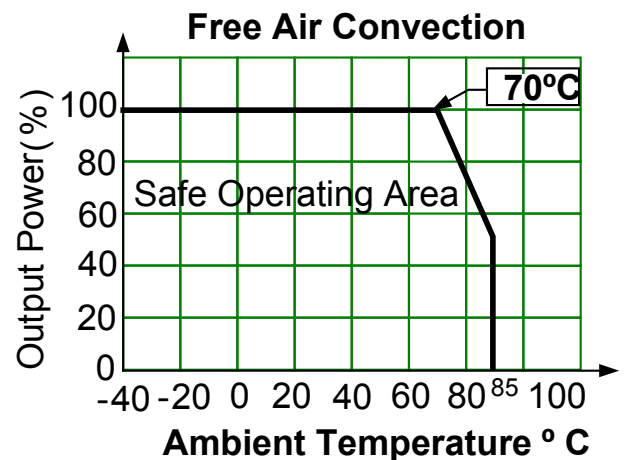


Recommended Application circuit for reducing the output ripple and noises:

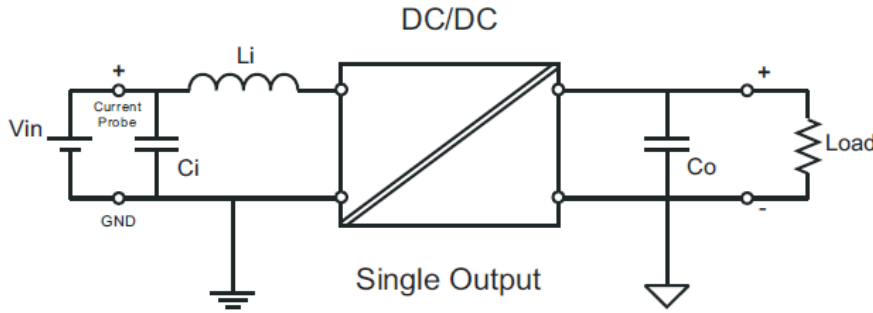

Recommended Output Capacitor to reduce the converter’s ripple and noises for single output models is $4.7\mu\text{F}$ to $100\mu\text{F}$ and for dual output models is $4.7\mu\text{F}$ to $68\mu\text{F}$ connected to both outputs. L_i with value of $12\mu\text{H}$ and C_i with value $10\mu\text{F}$ to $100\mu\text{F}$ are recommended to be connected to the input of the converter for EMI improvement.

EMI Filter Circuit Example

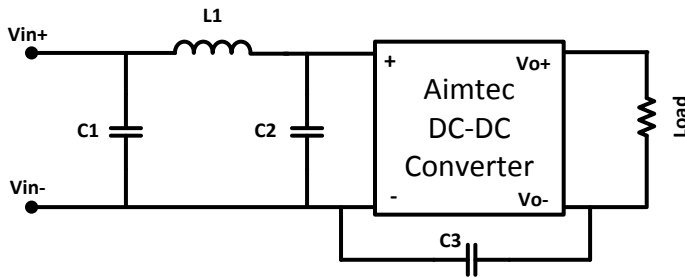

V_{in}	C1	L1	C2	C3
3.3V	2.2 μF / 100V	18 μH		
5 V	2.2 μF / 100V	18 μH		
12 V	2.2 μF / 100V	18 μH		
15 V	2.2 μF / 100V	18 μH		
24 V	2.2 μF / 100V	18 μH	2.2 μF / 100V	470 pF / 2kV
48 V	* 10 μF / 100V	18 μH	2.2 μF / 100V	470 pF / 2kV

* Electrolytic type

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C , humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec’s standard Terms of Sale available at www.aimtec.com.