



EC3SAW SERIES

3 WATT 4:1 INPUT

DC-DC CONVERTERS

FEATURES

- * 3W Isolated Output
- * Compact SIP-8 Package
- * Efficiency to 85%
- * 4:1 Input Range
- * Regulated Outputs
- * Remote On/Off Control
- * 1500VDC Isolation
- * Continuous Short Circuit Protection
- * Input Under Voltage Protection
- * Without Tantalum Capacitors inside



| MODEL NUMBER | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | | INPUT CURRENT | | EFF. (%) | Capacitor Load max |
|---------------|---------------|----------------|----------------|---------|---------------|-----------|----------|--------------------|
| | | | MIN. | MAX. | NO LOAD | FULL LOAD | | |
| EC3SAW-24S33P | 9-36 VDC | 3.3VDC | 0 mA | 700 mA | 4 mA | 122 mA | 79 | 1800uF |
| EC3SAW-24S05P | 9-36 VDC | 5VDC | 0 mA | 600 mA | 4 mA | 154 mA | 81 | 1000uF |
| EC3SAW-24S12P | 9-36 VDC | 12VDC | 0 mA | 250 mA | 8 mA | 150 mA | 84 | 220uF |
| EC3SAW-24S15P | 9-36 VDC | 15VDC | 0 mA | 200 mA | 8 mA | 150 mA | 84 | 120uF |
| EC3SAW-24D05P | 9-36 VDC | ±5VDC | 0 mA | ±300 mA | 8 mA | 154 mA | 81 | ±470uF |
| EC3SAW-24D12P | 9-36 VDC | ±12VDC | 0 mA | ±125 mA | 12 mA | 150 mA | 84 | ±100uF |
| EC3SAW-24D15P | 9-36 VDC | ±15VDC | 0 mA | ±100 mA | 12 mA | 151 mA | 83 | ±47uF |
| EC3SAW-48S33P | 18-75 VDC | 3.3VDC | 0 mA | 700 mA | 3 mA | 61 mA | 79 | 1800uF |
| EC3SAW-48S05P | 18-75 VDC | 5VDC | 0 mA | 600 mA | 3 mA | 76 mA | 82 | 1000uF |
| EC3SAW-48S12P | 18-75 VDC | 12VDC | 0 mA | 250 mA | 5 mA | 74 mA | 85 | 220uF |
| EC3SAW-48S15P | 18-75 VDC | 15VDC | 0 mA | 200 mA | 5 mA | 75 mA | 84 | 120uF |
| EC3SAW-48D05P | 18-75 VDC | ±5VDC | 0 mA | ±300 mA | 5 mA | 76 mA | 82 | ±470uF |
| EC3SAW-48D12P | 18-75 VDC | ±12VDC | 0 mA | ±125 mA | 10 mA | 75 mA | 84 | ±100uF |
| EC3SAW-48D15P | 18-75 VDC | ±15VDC | 0 mA | ±100 mA | 10mA | 75 mA | 83 | ±47uF |

NOTE: 1. Nominal Input Voltage 24 or 48 VDC

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

| | | |
|--|-----------|-------------|
| Input Voltage Range..... | 24V | 9-36V |
| | 48V | 18-75V |
| Input Surge Voltage (100ms max.) | 24V | 50Vdc max |
| | 48V | 100Vdc max. |

Under-Voltage Protection :

| | |
|----------------------|-------------|
| 24Vin Power up | 7.5 VDC max |
| Power down | 6 VDC min |
| 48Vin Power up | 15 VDC max |
| Power down | 12 VDC min |

Input Filter Capacitive

Remote on/off control :

| | |
|---------------------------------------|--------------|
| Module On | Open Circuit |
| Module Off | < 1.2VDC |
| Module Off (input idle current) | 1mA max. |

OUTPUT SPECIFICATIONS:

| | |
|---|------------|
| Voltage Accuracy | ±1.5% max. |
| Voltage Balance(Dual) | ±1.0% max. |
| Cross regulation(Dual)(Note4)...Asymmetrical load 25%/100%..... | ±5.0% max |

Transient Response: 25% Step Load Change

| | |
|---------------------|------------------|
| Error Band | ±6% Vout nominal |
| Recovery Time | < 500us |

Ripple & Noise, 20MHz BW 50mV pk-pk, max.

Temperature Coefficient..... ±0.03%/°C

Line Regulation (Note1) ±0.5% max.

| | | |
|-------------------------------|--------------|------------|
| Load Regulation (Note2) | Single | ±0.5% max. |
| | Dual | ±1.0% max. |

Output Short Circuit Protection Continuous

Start up time 5ms max

GENERAL SPECIFICATIONS:

| | |
|------------------------------------|--|
| Efficiency..... | See Table |
| Isolation Voltage | 1500VDC min. |
| Isolation Resistance | 10 ⁹ ohm min. |
| Isolation Capacitance..... | 500pF Typ. |
| Switching Frequency | 100KHz min. |
| Operating Ambient Temperature..... | -40°C to +85°C |
| Power de-rating Curve..... | see Figure1 |
| De-rating, Above 71°C | Linearly to Zero power at 100°C |
| Case Temperature (Note3)..... | 100°C max. |
| Cooling..... | Natural Convection |
| Storage Temperature | -55°C to +125°C |
| Humidity..... | 95% RH max. Non condensing |
| MTBF | MIL-STD-217F, GB T.B.D. hrs |
| EMI | Conductive EMI Meet EN55022 Class A & Class B(Note5) |
| Dimensions | 0.86×0.36×0.44 inches(21.80×9.20×11.10 mm) |
| Case Material | Non-Conductive Black Plastic |
| Weight..... | 4.8g |

NOTE :

1. Measured From High Line to Low Line
2. Measured From Full Load to 10% Load
3. Maximum case temperature under any operating condition should not be exceeded 100°C.
4. For asymmetric loading, Both channels must be at 25% load or more
5. The EC3SAW series meet EN55022 Class A & Class B with external C-L filter before the input pins to the converter. (see application note)


CASE SA DIMENSIONS:

All Dimensions In Inches(mm)


Tolerances : Inches millimeters

X. XX±0.02 X.X±0.5

Pin ±0.002 ±0.05

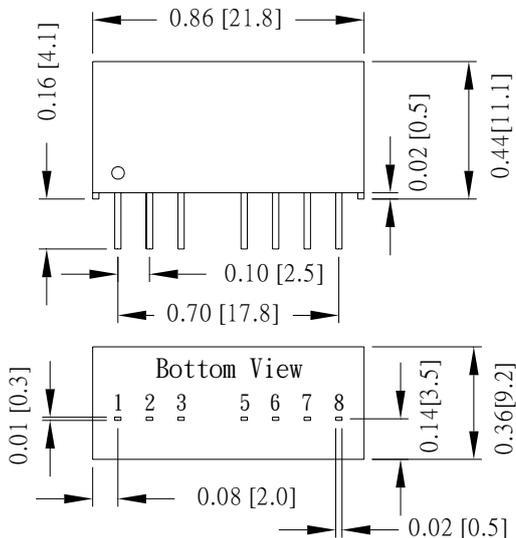

Typical Derating curve for Natural Convection

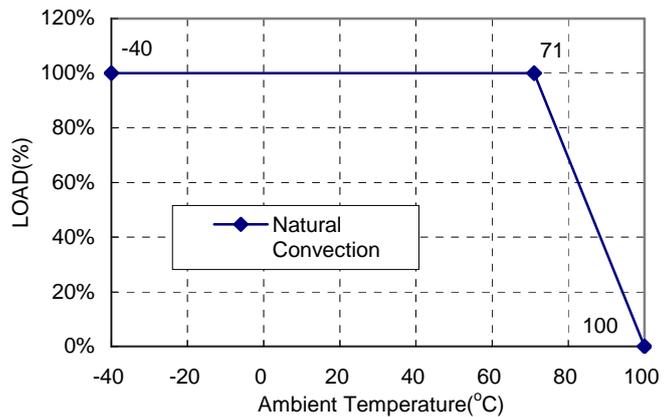

| PIN CONNECTION | | |
|----------------|--------|--------|
| Pin | Single | Dual |
| 1 | -Vin | -Vin |
| 2 | +Vin | +Vin |
| 3 | CTRL | CTRL |
| 5 | NC | NC |
| 6 | +Vo | +Vo |
| 7 | -Vo | Common |
| 8 | NC | -Vo |