



FEATURES

- ◆ RoHS compliant
- ◆ Efficiency up to 86%
- ◆ 1"×1" DIP Package
- ◆ Wide temperature performance at full 6 Watt load, -40°C to 85°C
- ◆ UL 94V-0 package material
- ◆ No heat sink required
- ◆ Low ripple and good EMC Features
- ◆ Industry standard pin out
- ◆ Power sharing on output
- ◆ I/O Isolation 1500VDC
- ◆ Short Circuit Protection (automatic recovery)
- ◆ Metal case 1"×1" DIP package
- ◆ MTBF > 1000000 hours

MODEL SELECTION

WRB^①24^②05^③Y^④M^⑤D^⑥-6W(1200)^⑦

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ Wide (2:1) Input Range
- ⑤ Metal Shield
- ⑥ 1"×1" DIP Package
- ⑦ Rated Power (Output current)

DESCRIPTION

The WRA_YMD-6W & WRB_YMD-6W series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) where the voltage of the input power supply is wide range (voltage range $\leq 2:1$);
- 2) where isolation is necessary between input and output (isolation voltage $\leq 1500\text{VDC}$);
- 3) where the regulation of the output voltage and the output ripple noise are demanded.



SELECTION GUIDE

order code	Input			Output			Efficiency (%, Typ)
	Voltage (VDC)			Current (mA)		Voltage (VDC)	
	Nominal	Range	Max*	Max	Min		
WRA0505YMD-6W	5	4.5-9.0	11	±600	±60	±5	75
WRA0512YMD-6W	5	4.5-9.0	11	±250	±25	±12	80
WRA0515YMD-6W	5	4.5-9.0	11	±200	±20	±15	82
WRB0505YMD-6W	5	4.5-9.0	11	1200	120	5	76
WRB0512YMD-6W	5	4.5-9.0	11	500	50	12	80
WRB0515YMD-6W	5	4.5-9.0	11	400	40	15	82
WRA1205YMD-6W	12	9.0-18.0	20	±600	±60	±5	79
WRA1212YMD-6W	12	9.0-18.0	20	±250	±25	±12	82
WRA1215YMD-6W	12	9.0-18.0	20	±200	±20	±15	84
WRA1248YMD-6W	12	9.0-18.0	20	±62	±6	±48	83
WRB1205YMD-6W	12	9.0-18.0	20	1200	120	5	79
WRB1212YMD-6W	12	9.0-18.0	20	500	50	12	82
WRB1215YMD-6W	12	9.0-18.0	20	400	40	15	84
WRB1224YMD-6W	12	9.0-18.0	20	250	25	24	82
WRB1248YMD-6W	12	9.0-18.0	20	125	12	48	83
WRA2405YMD-6W	24	18.0-36.0	40	±600	±60	±5	81
WRA2412YMD-6W	24	18.0-36.0	40	±250	±25	±12	84
WRA2415YMD-6W	24	18.0-36.0	40	±200	±20	±15	86
WRB2403YMD-1500	24	18.0-36.0	40	1500	150	3.3	78
WRB2405YMD-6W	24	18.0-36.0	40	1200	120	5	80
WRB2412YMD-6W	24	18.0-36.0	40	500	50	12	84
WRB2415YMD-6W	24	18.0-36.0	40	400	40	15	86
WRB2424YMD-6W	24	18.0-36.0	40	250	25	24	85
WRB3612YMD-6W	36	28.0-60.0	60	500	50	12	84
WRA4805YMD-6W	48	36.0-72.0	80	±600	±60	±5	80
WRA4812YMD-6W	48	36.0-72.0	80	±250	±25	±12	84
WRA4815YMD-6W	48	36.0-72.0	80	±200	±20	±15	85
WRB4803YMD-1500	48	36.0-72.0	80	1500	150	3.3	78
WRB4805YMD-6W	48	36.0-72.0	80	1200	120	5	80
WRB4812YMD-6W	48	36.0-72.0	80	500	50	12	84
WRB4815YMD-6W	48	36.0-72.0	80	400	40	15	86
WRB4824YMD-6W	48	36.0-72.0	80	250	25	24	85
WRA9005YMD-6W	90	60-120	150	±600	±60	±5	80
WRB9005YMD-6W	90	60-120	150	1200	120	5	80
WRA11005YMD-6W	110	72-144	155	±600	±60	±5	87
WRB11005YMD-6W	110	72-144	155	1200	120	5	86

* Input voltage can't exceed this value, or will cause the permanent damage.

OUTPUT SPECIFICATIONS

Parameter	Test conditions	Min.	Typ.	Max.	Units
Output power	See above products program	0.6		6	W
Positive voltage accuracy	Refer to recommended circuit		±1.0	±3.0	%
Negative voltage accuracy	Refer to recommended circuit		±3.0	±5.0	%
Load regulation	From 10% to 100% full load		±0.5	±1.0	%
Line regulation (at full load)	Input voltage from low to high		±0.2	±0.5	%
Temperature drift (Vout)	Refer to recommended circuit			±0.0	%/°C
Output Ripple**	20MHz Bandwidth		20	50	MV p-p
Output Noise**	20MHz Bandwidth		50	100	MV p-p
Switching frequency	100% Full load, input voltage range		300		KhZ

* Dual output models unbalanced load (25/100%): ±5% Max


** Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

TEMPERATURE CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Storage humidity range				95	%
NO-load power consumption			500		mW
Operating temperature		-40		85	°C
Storage temperature		-55		125	°C
Lead temperature	1.5mm from case for 10 seconds			300	°C
Temp.rise at full load			15		°C
Cooling	Free air convection				
Case material	Plastic(UL94-V0)				
Short circuit protection*	Continuous,automatic recovery				
Case material	Copper metal or Aluminum alloy				
MTBF		1000			K hours
Weight			15		g

*Supply voltage must be discontinued at the end of short circuit duration.

TYPICAL CHARACTERISTICS

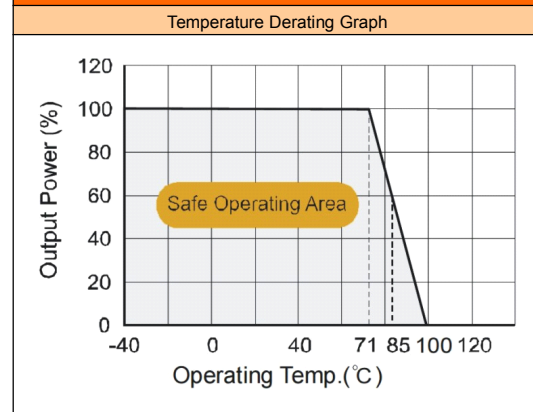

ISOLATION SPECIFICATIONS

Parameter	Test conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 minute and 1mA max	1500			VDC
Isolation resistance	Test at Viso=500VDC	1000			MΩ
Isolation capacitance	Input/Output		100		pF

APPLICATION NOTE

1) Requirement on output load

In order to ensure the product operate efficiently and reliably, in addition to a max load (namely full load), a minimum load is specified for this kind of DC/DC converter. Make sure the specified range of input voltage is not exceeded, the minimum output load no less than 10% load. If the actual load is less than the specified minimum load, the output ripple may increase sharply while its efficiency and reliability will reduce greatly. If the actual output power is very small, please add an appropriate resistor as extra loading, or contact our company for other lower output power products.

2) Recommended Circuit

All the WRA_YMD-6W & WRB_YMD-6W Series have been tested according to the following recommended testing circuit before leaving factory. This series should be tested under load. Never be tested under no load (see Figure 1).

If you want to further decrease the input/output ripple, you can increase capacitance properly or choose capacitors with low ESR. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1). General:

$$\begin{aligned} \text{Cin: } & 5V\&12V \quad 100 \mu F \\ & 24V\&48V \quad 10 \mu F-47 \mu F \\ \text{Cout: } & 10PF/100mA \end{aligned}$$

3) Input current


When it is used in unregulated power supply, be sure that the fluctuating range of the power supply and the rippled voltage do not exceed the module standard. Input current of power supply should afford the startup current of this kind of DC/DC module (Figure 2).

$$\text{General: } I_p \leq 1.4 * I_{in-max}$$


4) No parallel connection or plug and play

RECOMMENDED CIRCUIT

OUTPUT Graph

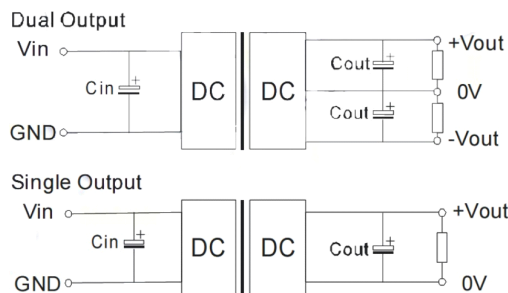

(Figure 1)

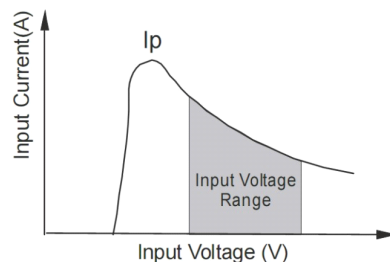


(Figure 2)

EXTERNAL CAPACITOR TABLE (TABLE 1)

Single Vout (VDC)	Cout (μF)	Dual Vout (VDC)	Cout (μF)
3.3	2200	±5	680
5	1000	±9	470
9	680	±12	330
12	470	±15	220
15	330	-	-
24	220	-	-

OUTLINE DIMENSIONS & FOOTPRINT DETAILS


MECHANICAL DIMENSIONS

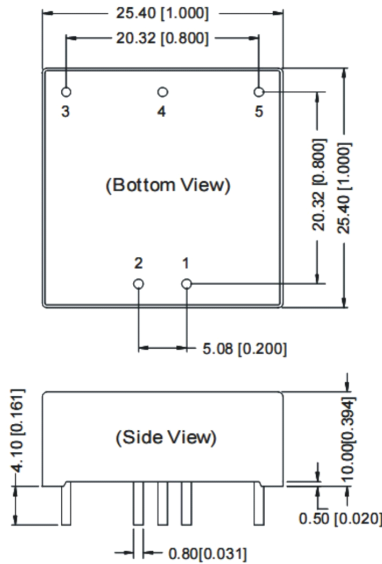

Note:
 Unit:mm[inch]
 Pin section tolerances:±0.10mm[±0.004inch]
 General tolerances:±0.25mm[±0.010inch]


RECOMMENDED FOOTPRINT

Dual/Single Output

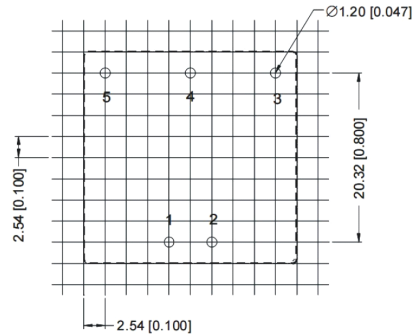

RECOMMENDED FOOTPRINT
 Top view,grid:2.54mm(0.1inch)
 diameter:1.00mm(0.039inch)

TUBE OUTLINE DIMENSIONS

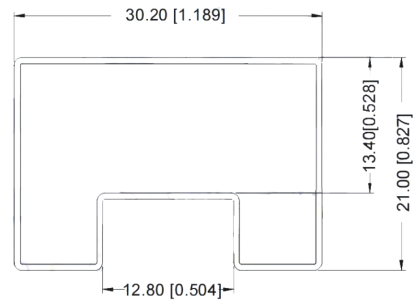

Note:
 Unit :mm[inch]
 General tolerances: ±0.50mm[±0.020inch]
 L=530mm[20.866inch] Tube Quantity: 19pcs
 L=220mm[8.661inch] Tube Quantity: 7pcs

When the environment temperature is higher than 71°C, the product output over should be less than 60% of the rated power.

No parallel connection or plug and play.

Use dual output simultaneously, forbid opening output pin (0V) to use as single output.

FOOTPRINT DETAILS

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+V0	+V0
4	NC	0V
5	0V	-V0

Note:

1. The load shouldn't be less than 10%, otherwise ripple will increase dramatically.
2. Operation under 10% load will not damage the converter; However, they may not meet all specification listed.
3. All specifications measured at Ta=25°C, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
4. In this data sheet, all the test methods of indications are based on corporate standards.
5. Only typical models listed, other models may be different, please contact our technical person for more details.

RoHS COMPLIANT INFORMATION

This series is compatible with RoHS soldering systems with a peak wave solder temperature of 300° C for 10 seconds. The pin termination finish on the SIP package type is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The DIP types are Matte Tin over Nickel Preplate. Both types in this series are backward compatible with Sn/Pb soldering systems.

REACH COMPLIANT INFORMATION

This series has proven that this product does not contain harmful chemicals, it also has harmful chemical substances through the registration, inspection and approval.