



FEATURES:

- RoHS compliant
- 12 Pin SIP Package
- Low ripple and noise
- High efficiency up to 70%
- Operating temperature -40°C to + 85°C
- Input / Output Isolation 1000, 3000 or 5200VDC
- Pin compatible with multiple manufacturers

Models

Single output

Input/Output Isolation 1000VDC



| Model | Input Voltage (V) | Output Voltage (V) | Output Current max (mA) | Capacitive load, max (µF) | Efficiency (%) |
|-------------|-------------------|--------------------|-------------------------|---------------------------|----------------|
| AM2F-0503SZ | 4.5-5.5 | 3.3 | 600 | 470 | 64 |
| AM2F-0505SZ | 4.5-5.5 | 5 | 400 | 470 | 66 |
| AM2F-0507SZ | 4.5-5.5 | 7.2 | 278 | 470 | 64 |
| AM2F-0509SZ | 4.5-5.5 | 9 | 222 | 470 | 66 |
| AM2F-0512SZ | 4.5-5.5 | 12 | 167 | 470 | 70 |
| AM2F-0515SZ | 4.5-5.5 | 15 | 134 | 470 | 70 |
| AM2F-0518SZ | 4.5-5.5 | 18 | 111 | 470 | 67 |
| AM2F-0524SZ | 4.5-5.5 | 24 | 83 | 470 | 68 |
| AM2F-1203SZ | 10.8-13.2 | 3.3 | 600 | 470 | 64 |
| AM2F-1205SZ | 10.8-13.2 | 5 | 400 | 470 | 66 |
| AM2F-1207SZ | 10.8-13.2 | 7.2 | 278 | 470 | 63 |
| AM2F-1209SZ | 10.8-13.2 | 9 | 222 | 470 | 66 |
| AM2F-1212SZ | 10.8-13.2 | 12 | 167 | 470 | 70 |
| AM2F-1215SZ | 10.8-13.2 | 15 | 134 | 470 | 70 |
| AM2F-1218SZ | 10.8-13.2 | 18 | 111 | 470 | 66 |
| AM2F-1224SZ | 10.8-13.2 | 24 | 83 | 470 | 68 |
| AM2F-2403SZ | 21.6-26.4 | 3.3 | 600 | 470 | 54 |
| AM2F-2405SZ | 21.6-26.4 | 5 | 400 | 470 | 64 |
| AM2F-2407SZ | 21.6-26.4 | 7.2 | 278 | 470 | 63 |
| AM2F-2409SZ | 21.6-26.4 | 9 | 222 | 470 | 64 |
| AM2F-2412SZ | 21.6-26.4 | 12 | 167 | 470 | 68 |
| AM2F-2415SZ | 21.6-26.4 | 15 | 134 | 470 | 68 |
| AM2F-2418SZ | 21.6-26.4 | 18 | 111 | 470 | 68 |
| AM2F-2424SZ | 21.6-26.4 | 24 | 83 | 470 | 70 |

Input/Output Isolation 3000VDC

| | | | | | |
|----------------|-----------|-----|-----|-----|----|
| AM2F-0503SH30Z | 4.5-5.5 | 3.3 | 600 | 470 | 64 |
| AM2F-0505SH30Z | 4.5-5.5 | 5 | 400 | 470 | 66 |
| AM2F-0507SH30Z | 4.5-5.5 | 7.2 | 278 | 470 | 64 |
| AM2F-0509SH30Z | 4.5-5.5 | 9 | 222 | 470 | 66 |
| AM2F-0512SH30Z | 4.5-5.5 | 12 | 167 | 470 | 70 |
| AM2F-0515SH30Z | 4.5-5.5 | 15 | 134 | 470 | 70 |
| AM2F-0518SH30Z | 4.5-5.5 | 18 | 111 | 470 | 67 |
| AM2F-0524SH30Z | 4.5-5.5 | 24 | 83 | 470 | 68 |
| AM2F-1203SH30Z | 10.8-13.2 | 3.3 | 600 | 470 | 64 |
| AM2F-1205SH30Z | 10.8-13.2 | 5 | 400 | 470 | 66 |
| AM2F-1207SH30Z | 10.8-13.2 | 7.2 | 278 | 470 | 63 |
| AM2F-1209SH30Z | 10.8-13.2 | 9 | 222 | 470 | 66 |
| AM2F-1212SH30Z | 10.8-13.2 | 12 | 167 | 470 | 70 |
| AM2F-1215SH30Z | 10.8-13.2 | 15 | 134 | 470 | 70 |
| AM2F-1218SH30Z | 10.8-13.2 | 18 | 111 | 470 | 66 |
| AM2F-1224SH52Z | 10.8-13.2 | 24 | 83 | 470 | 68 |
| AM2F-2403SH30Z | 21.6-26.4 | 3.3 | 600 | 470 | 64 |
| AM2F-2405SH30Z | 21.6-26.4 | 5 | 400 | 470 | 64 |

Models

Single output (continued)
Input/Output Isolation 3000VDC

| Model | Input Voltage (V) | Output Voltage (V) | Output Current max (A) | Capacitive load, max (µF) | Efficiency (%) |
|---------------------------------------|-------------------|--------------------|------------------------|---------------------------|----------------|
| AM2F-2407SH30Z | 21.6-26.4 | 7.2 | 278 | 470 | 63 |
| AM2F-2409SH30Z | 21.6-26.4 | 9 | 222 | 470 | 64 |
| AM2F-2412SH30Z | 21.6-26.4 | 12 | 167 | 470 | 68 |
| AM2F-2415SH30Z | 21.6-26.4 | 15 | 134 | 470 | 68 |
| AM2F-2418SH30Z | 21.6-26.4 | 18 | 111 | 470 | 68 |
| AM2F-2424SH30Z | 21.6-26.4 | 24 | 83 | 470 | 70 |
| Input/Output Isolation 5200VDC | | | | | |
| AM2F-0503SH52Z | 4.5-5.5 | 3.3 | 600 | 470 | 53 |
| AM2F-0505SH52Z | 4.5-5.5 | 5 | 400 | 470 | 66 |
| AM2F-0507SH52Z | 4.5-5.5 | 7.2 | 278 | 470 | 64 |
| AM2F-0509SH52Z | 4.5-5.5 | 9 | 222 | 470 | 66 |
| AM2F-0512SH52Z | 4.5-5.5 | 12 | 167 | 470 | 70 |
| AM2F-0515SH52Z | 4.5-5.5 | 15 | 134 | 470 | 70 |
| AM2F-0518SH52Z | 4.5-5.5 | 18 | 111 | 470 | 67 |
| AM2F-0524SH52Z | 4.5-5.5 | 24 | 83 | 470 | 68 |
| AM2F-1203SH52Z | 10.8-13.2 | 3.3 | 600 | 470 | 53 |
| AM2F-1205SH52Z | 10.8-13.2 | 5 | 400 | 470 | 66 |
| AM2F-1207SH52Z | 10.8-13.2 | 7.2 | 278 | 470 | 63 |
| AM2F-1209SH52Z | 10.8-13.2 | 9 | 222 | 470 | 66 |
| AM2F-1212SH52Z | 10.8-13.2 | 12 | 167 | 470 | 70 |
| AM2F-1215SH52Z | 10.8-13.2 | 15 | 134 | 470 | 70 |
| AM2F-1218SH52Z | 10.8-13.2 | 18 | 111 | 470 | 66 |
| AM2F-1224SH52Z | 10.8-13.2 | 24 | 83 | 470 | 68 |
| AM2F-2403SH52Z | 21.6-26.4 | 3.3 | 600 | 470 | 54 |
| AM2F-2405SH52Z | 21.6-26.4 | 5 | 400 | 470 | 64 |
| AM2F-2407SH52Z | 21.6-26.4 | 7.2 | 278 | 470 | 63 |
| AM2F-2409SH52Z | 21.6-26.4 | 9 | 222 | 470 | 64 |
| AM2F-2412SH52Z | 21.6-26.4 | 12 | 167 | 470 | 68 |
| AM2F-2415SH52Z | 21.6-26.4 | 15 | 134 | 470 | 68 |
| AM2F-2418SH52Z | 21.6-26.4 | 18 | 111 | 470 | 68 |
| AM2F-2424SH52Z | 21.6-26.4 | 24 | 83 | 470 | 70 |

Input Specifications

| Parameters | Nominal | Typical | Maximum | Units |
|--------------------------------|-----------|-----------|---------|-------|
| Voltage range | 5 | 4.5-5.5 | | VDC |
| | 12 | 10.8-13.2 | | |
| | 24 | 21.6-25.4 | | |
| Filter | Capacitor | | | |
| Turn on Transient process time | | | 100 | ms |
| Start up time | | 300 | | ms |
| Absolute Maximum Rating | 5 Vin | 0-7 | | VDC |
| | 12 Vin | 0-15 | | |
| | 24 Vin | 0-28 | | |
| Peak Input Voltage time | | 100 | | ms |

Isolation Specifications

| Parameters | Conditions | Typical | Rated | Units |
|--------------------|------------|---------|--------------------|-------|
| Tested I/O voltage | 3 sec | | 1000, 3000 or 5200 | VDC |
| Resistance | | > 1000 | | MOhm |
| Capacitance | | 60 | | pF |

Output Specifications

| Parameters | Conditions | Typical | Maximum | Units |
|---|-----------------------|---------------|---------|--------|
| Voltage accuracy | | ±2 | | % |
| Short Circuit protection | | Continuous | | |
| Short Circuit restart | | Auto-recovery | | |
| Line voltage regulation (Single) | | ±0.5 | | % |
| Load voltage regulation (Single) | Load 0 – 100% | ±0.5 | | % |
| Load voltage regulation (Single) 3.3V output model | Load 0 – 100% | ±1.5 | | % |
| Temperature coefficient | | ±0.02 | | %/°C |
| Ripple & Noise | At 20MHz Bandwidth | 75 | | mV p-p |
| Rising time | | 150 | | ms |

General Specifications


| Parameters | Conditions | Typical | Maximum | Units |
|------------------------|----------------------------|---|-------------------------|-------|
| Switching frequency | 100% load | 50 | | KHz |
| Operating temperature | Full Load without Derating | -40 to +85 | | °C |
| Storage temperature | | -40 to +125 | | °C |
| Max Case temperature | | | 90 | °C |
| Cooling | | Free air convection | | % |
| Humidity | | | 90 | % |
| Case material | | Plastic UL94-VO | | |
| Weight | | 3.8 | | g |
| Dimensions (L x W x H) | | 1.25 x 0.34 x 0.53 inches | 31.80 x 8.60 x 13.47 mm | |
| MTBF | | >1 500 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C) | | |

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified

Pin Out Specifications

| Pin | 1000VDC | 3000 and 5200VDC |
|-----|-----------|------------------|
| 1 | +V Input | +V Input |
| 2 | N.C. | -V Input |
| 3 | N.C. | N.C. |
| 9 | N.C. | N.C. |
| 10 | -V Output | -V Output |
| 11 | +V Output | +V Output |
| 12 | -V Input | N.C. |

Dimensions

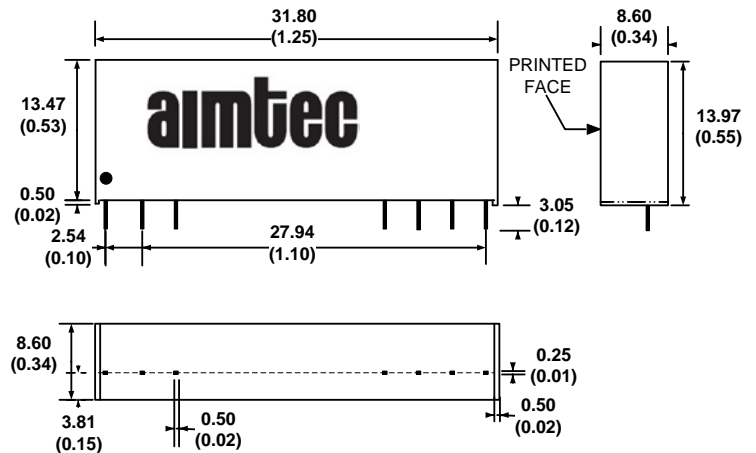

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.